

Beaverswood®


Anti-Slip Tape Rolls

Our **anti-slip tape** is manufactured through a unique process ensuring it's one of the most effective anti-slip surfaces available. The tape material is a thick carrier impregnated with diamond-hard aluminium oxide, making it hard-wearing as well as improving foot traction to prevent slips. The backing is coated in a heavy layer of permanent pressure-sensitive adhesive which is water-resistant and extremely durable.



Features and Benefits

- The tape material is impregnated with diamond-hard aluminium oxide, creating a perfect texture to enhance foot traction and prevent slipping.
- Tough and durable, withstanding most chemicals.
- High levels of grip (coefficient of friction).
- Peel-resistant and water-resistant to withstand heavy footfall in differing weather conditions.
- Easy to cut to size and install.
- Simply peel off the backing and stick the tape down on the desired surface (ensuring the surface is clean, flat, and dry during installation).
- Rolls of tape various widths and colours.
- 18.3 M rolls.

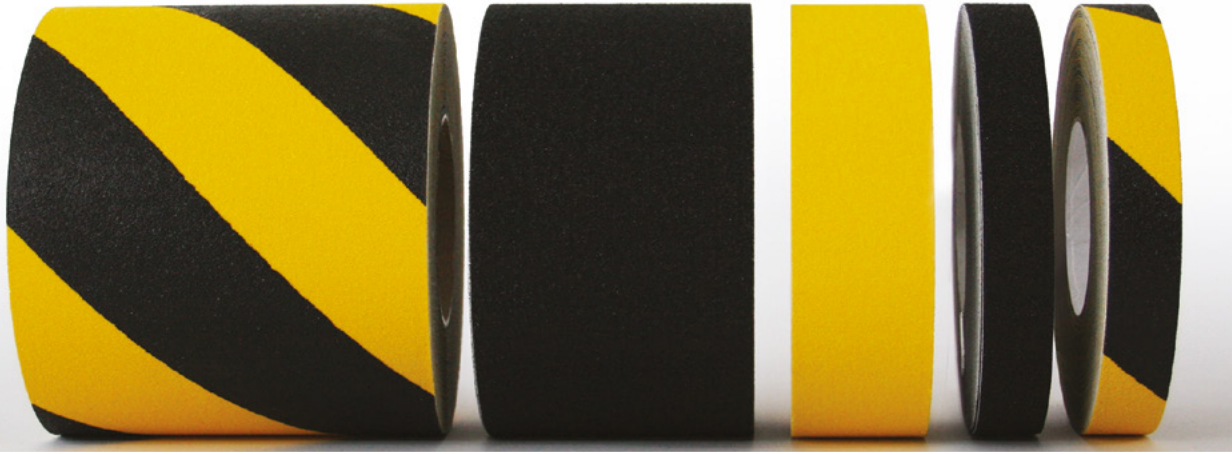

Material	0.1mm PVC back carrier with abrasive aluminium oxide secured by polymer resin
Widths	25 mm / 50 mm / 100 mm / 150 mm
Length	18.3 M
Adhesive	Pressure sensitive solvent acrylic based
Temperature range	-40°C to 80°C
Adhesion to steel	Over 1500 g/25.4 mm ²
Tensile strength	Over 6 kg/25 mm ²
Tear resistance	5600 g +/- 200 g
Peel adhesion	23.5N/25 mm
Elongation at break	Over 25%
Resistance to water	10 months
Resistance to chemicals	8 months
Resistance to oil	Excellent
Expected life	12 to 36 months
Dry surface pendulum	102 TRL
Wet surface pendulum	71 TRL
DIN 51130	R13
DIN 51130	Inclination 30°C
DIN 51130	High traction