


Beaverswood®


Floor Signal Markers

An effective solution for marking floor areas, these **floor signal markers** highlight walkways, traffic flow, pallet positions, and more. Manufactured using a thin plastic membrane and laminated with an aggressive adhesive, these **floor signals** bond strongly to the floor and are designed to withstand everyday abrasion from forklifts to footfall and pallets. They are suitable for application onto clean, flat, sealed surfaces.

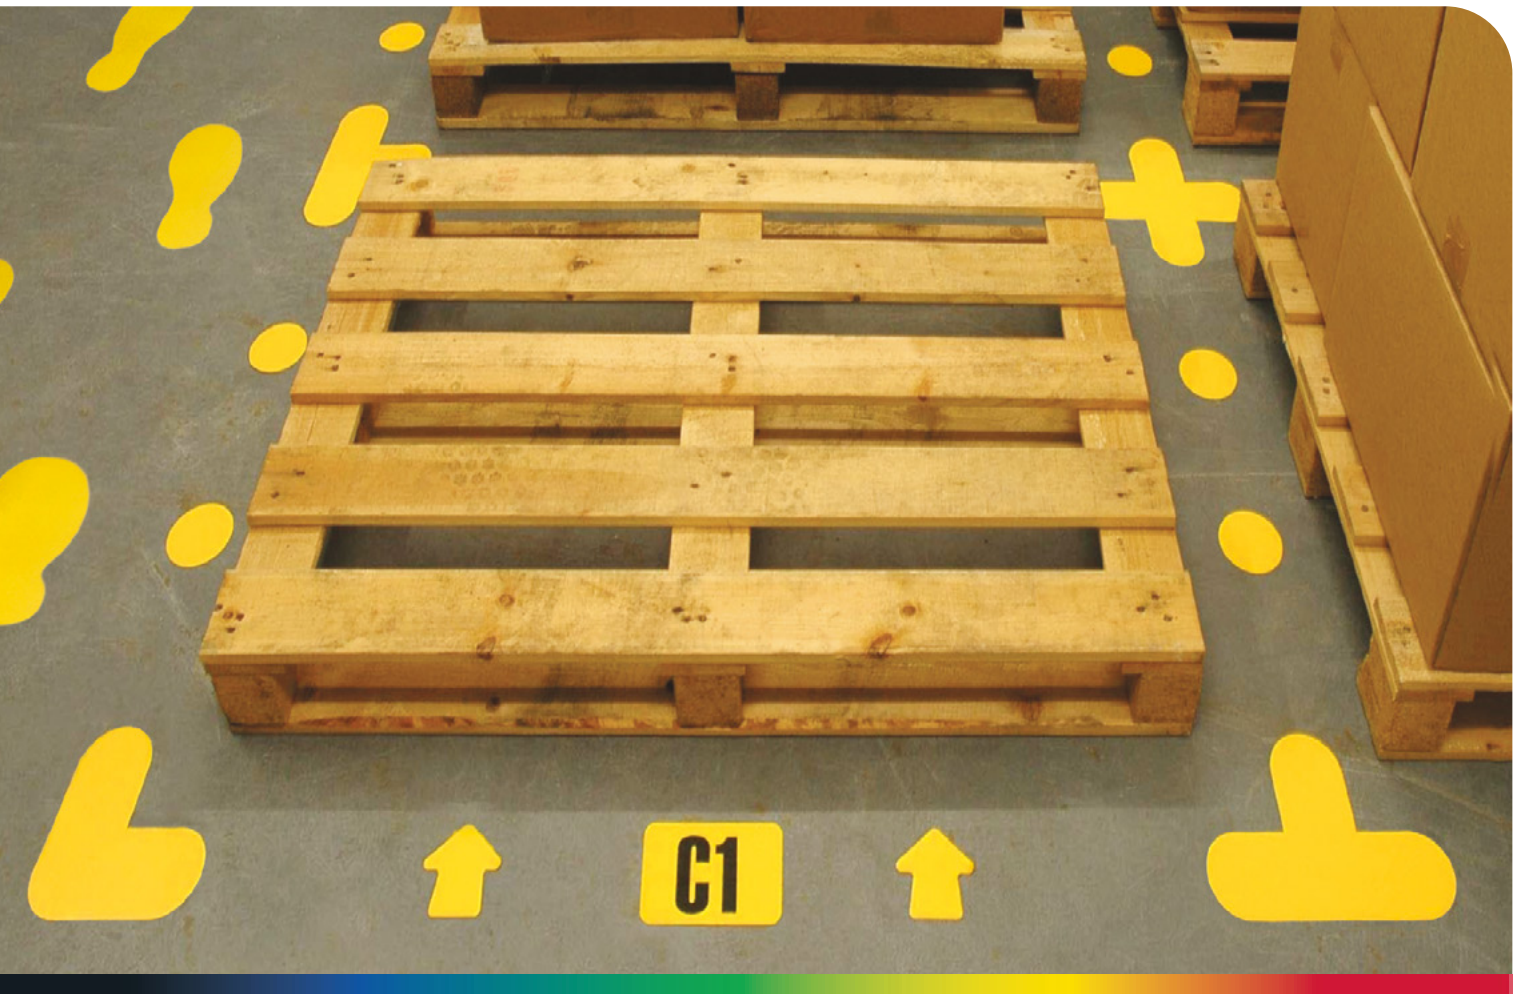

Features and Benefits

- Tough PVC with a strong adhesive backing.
- Designed to withstand warehouse traffic.
- Highlight walkways, forklift routes, block stack pallet areas, and more.
- Suitable for application onto a clean, flat, sealed surface.
- Available in six colours.
- Available in six designs.

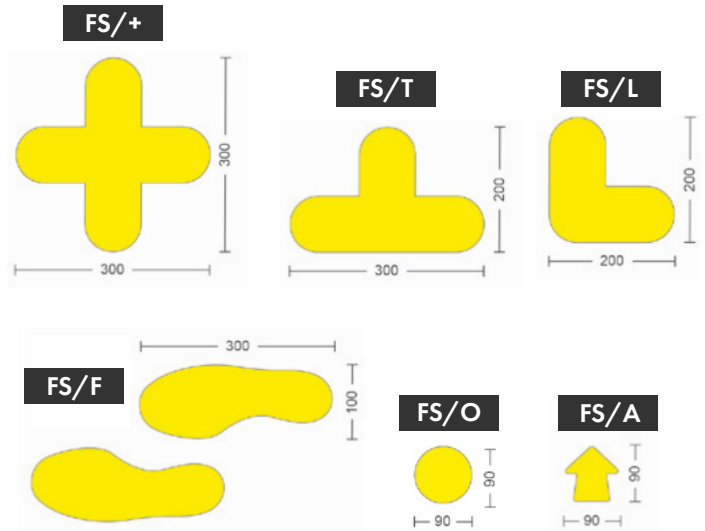

Material	Rigid matt PVC 200 micron
Dimensions	90 mm to 300 mm
Adhesive	Acrylic pressure sensitive adhesive
Thickness	EN I 1849-2 (micrometer) 200 = +/-8%
Tensile stress at break	EN ISO 527-3(200mm/min) L>43 T>37
Tensile strain at break	EN ISO 527-3(200mm/min) L>127 T>97
Shrinkage	DIN 53377(10 min;+80°C) <-5,0
Slip assessment: dry	Pendulum test @45° and 90° - low slip risk - 64 median
Solids content	52%
Viscosity (spindle 4, speed 20 rpm) Brookfield RVT type viscometer	1500 cps
Adhesion to stainless steel (20 mins) FINAT FTM1	25 N/25mm
Loop tack to stainless steel	18 N/ 25mm FINAT FTM9
Static shear (1 kg 25 x 25 mm) FINAT FTM8	8 hours
Colour options	Black / Blue / Red / Green / Yellow